

Urban Shade

Urban Shade Blockout

Features

Urban Shade has 'soft to touch' flock coating giving light, heat, and UV control, and is PVC free.

Care Instructions

Fabric should be regularly dusted / vacuumed as appropriate. If commercial spot cleaners are used, they must first be tested and allowed to dry on an inconspicuous area, to ensure compatibility.

Colour Options



Black

Charcoal

Seal

Pewter

Pebble



Quicksand

Birch

Alabaster

White



Fire retardant
AS1530 part 2

Luxaflex[®]

Urban Shade Blockout

Technical information

Fabric Density	Blockout
Composition	100% Polyester with foamed flocked acrylic coating (no fibreglass content).
Weight	410gsm
Thickness	0.7mm
Width	3000mm
Colour Fastness	5 Blue Scale
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 8 Range [0-20]
Weave	Plain fabric
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Black	Charcoal	Seal	Pewter	Pebble
---------------	-------	----------	------	--------	--------

Optical/Light properties


Visual Light Transmittance	0%	0%	0%	0%	0%
Openness factor (nominal)	0%	0%	0%	0%	0%

Heat/Solar properties

Solar transmittance	0%	0%	0%	0%	0%
Solar reflectance	64%	64%	64%	64%	64%
Solar absorbance	36%	36%	36%	36%	36%

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

Colour options presented with data specifications

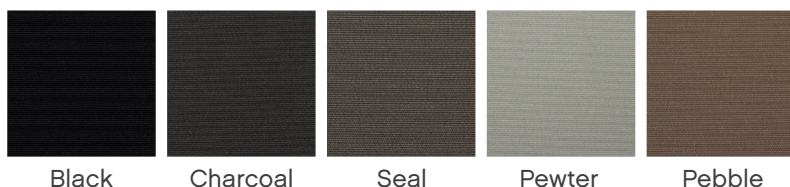

New Zealand Window Shades Ltd.
 PO Box 12 785, Penrose, Auckland 1642, New Zealand
 Luxaflex® is a division of New Zealand Window Shades Ltd.
 ©Copyright 2019 New Zealand Window Shades Ltd.

June 2019



Fire retardant
 AS1530 part 2

Luxaflex®

Urban Shade Blockout

Technical information

Fabric Density	Blockout
Composition	100% Polyester with foamed flocked acrylic coating (no fibreglass content).
Weight	410gsm
Thickness	0.7mm
Width	3000mm
Colour Fastness	5 Blue Scale
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 8 Range [0-20]
Weave	Plain fabric
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Quicksand	Birch	Alabaster	White
---------------	-----------	-------	-----------	-------

Optical/Light properties

Visual Light Transmittance	0%	0%	0%	0%
Openness factor (nominal)	0%	0%	0%	0%

Heat/Solar properties

Solar transmittance	0%	0%	0%	0%
Solar reflectance	64%	64%	64%	64%
Solar absorbance	36%	36%	36%	36%

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

Colour options presented with data specifications



New Zealand Window Shades Ltd.
 PO Box 12 785, Penrose, Auckland 1642, New Zealand
 Luxaflex® is a division of New Zealand Window Shades Ltd.
 ©Copyright 2019 New Zealand Window Shades Ltd.

June 2019



Fire retardant
 AS1530 part 2

Luxaflex®