

Verosol[®] Omniascreen

Metallised 3% openness

Verosol[®] Omniascreen Sunscreen


Features

Verosol Omniascreen sunscreen helps you to create natural shade, block sun glare, control indoor temperature and save a tremendous amount of energy on cooling, lighting and heating. It is versatile with an ultra-thin layer of aluminium, highly reflective (up to 74% solar reflection) and helps to control temperature effectively. With the beautiful transparency sun glare can be blocked without blocking the view, giving the inside of the building a more open and spacious appearance whilst enhancing the living and working space.

Care Instructions

Verosol fabrics are anti-static and therefore dust repellent. For regular maintenance, use a soft feather duster or vacuum-clean with a soft brush in a low setting.

Colour Options

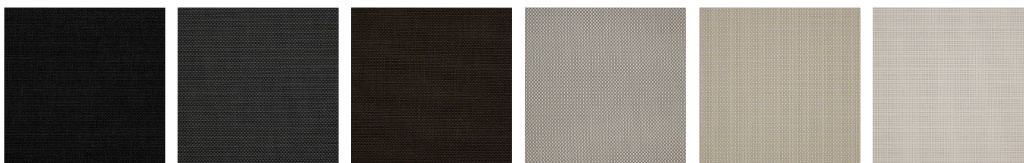

Black

Dark Grey

Bronze

Light Grey

Beige

White



Fire retardant
AS1530 part 2



Luxaflex[®]

Verosol® Omniascreen Metallised 3% openness Sunscreen

Technical information

Fabric Density	Semi Transparent
Composition	75% PVC / 25% PET
Weight	440gsm ± 5%
Thickness	0.55mm ± 5%
Width	2400mm
Colour Fastness	5
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index:
Weave	Basketweave
Organic emissions (VOC)	Phthalate free, Ökotex Standard 100, ISO 14001 and ISO 9001, Greenguard Gold.
Product Options	Roller Blinds

Fabric colour	Black	Dark Grey	Bronze	Light Grey	Beige	White
---------------	-------	-----------	--------	------------	-------	-------

Optical/Light properties

	Black	Dark Grey	Bronze	Light Grey	Beige	White
Visual Light Transmittance	5%	5%	5%	5%	5%	6%
Openness factor (nominal)	3%	3%	3%	3%	3%	3%

Heat/Solar properties


	Black	Dark Grey	Bronze	Light Grey	Beige	White
Solar transmittance	0%	0%	0%	0%	0%	0%
Solar reflectance	72%	72%	72%	73%	73%	74%
Solar absorbance	0%	0%	0%	0%	0%	0%

G-value / Solar heat gain coefficient

	Black	Dark Grey	Bronze	Light Grey	Beige	White
Glazing Type - High performance glazing (D EN14501)	0.8	0.8	0.8	0.8	0.8	0.8

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

Colour Options

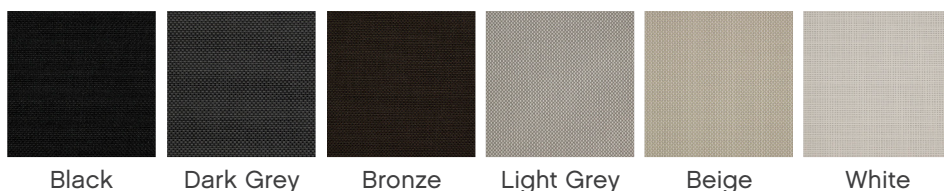

New Zealand Window Shades Ltd.
 PO Box 12 785, Penrose, Auckland 1642, New Zealand
 Luxaflex® is a division of New Zealand Window Shades Ltd.
 ©Copyright 2019 New Zealand Window Shades Ltd.



Fire retardant
 AS1530 part 2

